


AD 410

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	410,00	328,00	375,00	300,00	541,00

fP GDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D: A Z 5J F

TRANSFER SWITCH

AD 410

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	P158LE-1		
		%\$\$' "# "	
		' *&\$\$' "	
		Q,) \$\$\$< DQ	
	L	14,600	
	"	128 x 142	
		15,0:1	
	fl # ı	"# "	1500
	fl ı	L	21,00
		L	88,50
AbsorbedAirDischargeReSourceKey.Text	' # "	23,50	
	' # "	410,00	
	' # "	59,50	
	° C	520,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# ")\$ı	
		78,70	58,40 40,00


	Mecc Alte		
	ECO 40-1S/4		
	Hz	50	
	"	400,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	577,00	
Temperature		H	

		fl ı		fl ı	
	"	"	"	"	L
AD 410	3030,00	2965,00	1550,00	1994,00	700,00
		fl ı		fl ı	
	"	"	"	"	L
MS 70	4024	4400	1560	2360	700

AD 410

Doosan
Mecc Alte
D+' &'

1 D+' &'

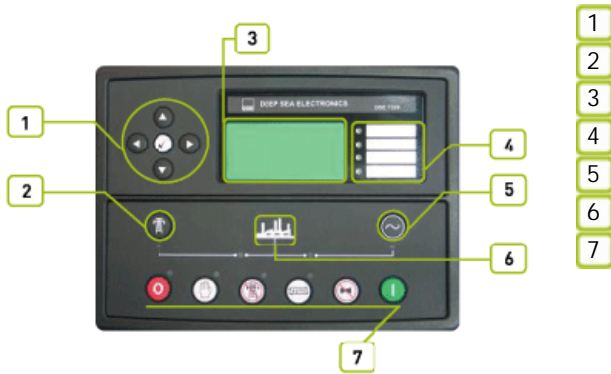

2

"8G9ž + ' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$' &&\$' ž

"8G9+' &\$' '8G9+' &\$'

ž

% &1 *(' žFG' &žFG(,) ž

ž

AD 410

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 410

Doosan
Mecc Alte
D+ &

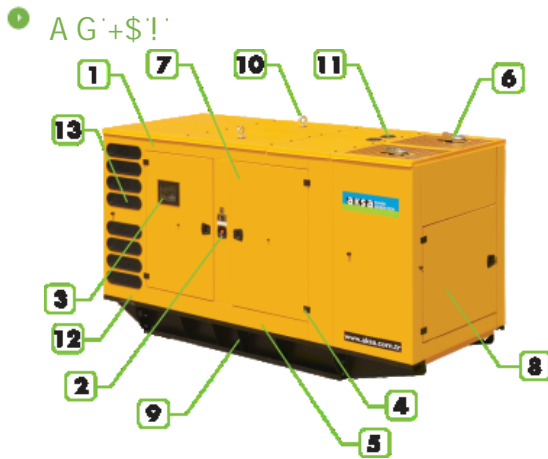

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	4400
fl "L	"	2360
	L	700