

# AC 66

Cummins  
Mecc Alte  
P 602



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

ž) \$' ž' \$ž' D:

	"	"	"	"	Amp
400/230	66,00	52,80	60,00	48,00	87,00

fPQDE

GC ; ) &

) & ž

fDF DE

%\$!

%

%&

GC " \$(\*\*

ž&(

GC

## ALTERNATOR

## TRANSFER SWITCH

# AC 66

Cummins  
Mecc Alte  
P 602

Manufacturer		Cummins		
Model		S3,8-G7		
		% \$ \$' "# "		
		* (Z \$' "		
		Q +Z \$ \$ < DQ		
	L	3,800		
	"	97 x 128		
		17,5:1		
	fl # ı	"# "	1500	
	fl ı	L	11,00	
		L	16,50	
Absorbed Air Discharge ReSource Key.Text	' # "	4,62		
	' # "	116,00		
	' # "	4,88		
	° C	509,00		
		12 V d.c.		
	Load	% \$ \$ı	' + )ı	) \$ı
	# "	14,70	11,00	6,10

		Mecc Alte
		ECO 32-2L/4
	Hz	50
	"	63,00
7 cg'		0,80
		3
	fl ı	400/230
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AC 66	950,00	2150,00	1050,00	1446,00	240,00
		fl ı		fl ı	
	"	"	"	"	L
AK 40	1300,00	3100	1057	1670	240



# AC 66

Cummins  
Mecc Alte  
P 602

9B: #9  
9b[ ]bY'gdYYX"  
C]'dfYggi fY"  
7cc'UbhY'a dYfUhi fY"  
F i b' hja Y"  
6UHYfmj c'rg"  
7cbZ[ i fUVY' hja ]b[ "  
; 9B9F 5HCF  
J c' hU[ Y f@ @B' "  
7i ffYbhf@&!@ ' "  
: fYei YbVW"  
A 5-BG  
J c' hU[ Y f@ @B' "  
: fYei YbVW"  
A U]bg'fYUXn'  
A U]bg'YbUV'YX"  
; Yb"GYhfYUXn'  
; Yb"GYhYbUV'YX"

K 5F B-B;  
7\Uf[ Y Z]i fY"  
6UHYfm@ck #:[ \ ] c' hU[ Y"  
: U] 'hc' ghcd"  
@ck #:[ \ ] [ YbYfUhc'f'j c' hU[ Y"  
I bXYf#j Yf[ YbYfUhc'f'Z'Yei YbVW"  
Cj Yf# bXYf'gdYYX"  
@ck c]'dfYggi fY"  
<][ \ V'c' UbhY'a dYfUhi fY"  
G<I H8CK BG  
: U] 'hc' gHfH  
9a Yf[ YbVW'ghcd"  
@ck c]'dfYggi fY"  
<][ \ V'c' UbhY'a dYfUhi fY"  
Cj Yf# bXYf'gdYYX"  
I bXYf#j Yf[ YbYfUhc'f'Z'Yei YbVW"  
I bXYf#j Yf[ YbYfUhc'f' c' hU[ Y"  
C]'dfYggi fY'gYbgcf'cdYb"  
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"  
9@97 HF =75@HF -D  
: YbYfUhc'f'c'j YfW'ffYbh'


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k ]h' h'Ya dYfUhi fYz  
dfYggi fYz dYfVW'bhU[ Y f'k Ufb]b[ #]i h'Xck b# 'YVW'VW' h'f'dL  
@c'W'gYh]b[ 'dUfUa YHfg'UbX'a cb]h'f]b[ 'Zca 'D7 'hc  
V'c'bfcc' a cXi 'Y'k ]h' I G6 V'c'bbYVW]cb'fa Ul '\* 'a H'

9'YVW]VW' GUZYhm#9A 7 'V'a dUHV] ]hm6G'9B '\* \$-) \$  
9'YVW]VW' Vi g]bYgg'Yei ]da Ybh'  
6G'9B '\*%\$!\*&9A 7 'ja a i b]mighUbXUfX"  
6G'9B '\*%\$!\*( '9A 7 'Ya ]gg]cb'ghUbXUfX

'6UHYfmVXUf[ Yf ]g'a Ubi ZVW' fYX'k ]h' 'gk ]hVW]b[ !a cXY'UbX'GA 8 'H'VW'bc'c[ mUbX'ih\Ug\ ] [ \ YZ]VW'YbVW' 6UHYfmVXUf[ Yf  
a cXY'gfci hdi hJ !=VXUfUWVf]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g' ] 'Ua dYfz% z' ] 'Zcf'%&j c'hUbX'&+Z' ] 'Zcf'&'( ' ] '  
#bdi h% , ' !&\* ( j c'h57 "' Dfc]bY'&(\$) \Ug'Z' 'mici hdi hg\chVW]hdfchVW]cb'UbX'ihVWb VY i gYX'Ug'U'W'ffYbhgci fVW"  
Dfc]bY'%&\$) #&(\$) VXUf[ Yf'\Ug'\ ] [ \ YZ]VW'YbVW'cb[ ' ]Z'Z' 'ck ZU]i fY'fUYZ' ] [ \ hk Y] [ \ hUbX' 'ck \ YUhfUX]UfYX' ]b  
UVW'cfXUbW'k ]h' ]bYUf'U'HYfbU]h'j Yg' H\Y'VXUf[ Yf ]g'Z'hYX'k ]h' U'dfchVW]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VXUf[ Y'Z]  
fY'UmV'c] VYhk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\YmUfY'Yei ]ddYX'k ]h' F: =Z]Hf'hc'fYXi VV'Y'YVW]VW'bc]gY'fUX]UfYX  
Zca 'h'Y'XY'jVW'; Uj Ub]VW' m]gc'UfYX' ]bdi hUbX'ci hdi h]md]VW' m(\_J 'Zcf'\ ] [ \ fY' ]UV] ]h'

# AC 66

Cummins  
Mecc Alte  
P 602

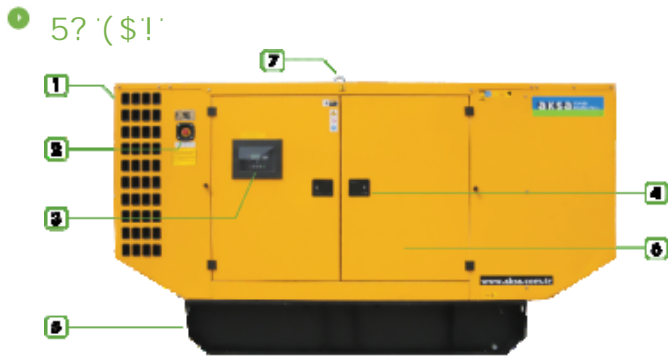

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1057
fl "L	"	3100
fl "L	"	1670
	L	240